


40W																							转矩单位换算： (kgf・cm×9.8÷100)=N・m (牛顿・米)									
速比i	3	5	7.5	10	12.5	15	18	20	25	30	36	50	60	75	90	100	120	150	180	250	300	500	750									
转速rpm (50HZ)	500	300	200	150	120	100	83	75	60	50	41	30	25	20	16	15	12.5	10	8.3	6	5	3	2									
转速rpm (60HZ)	600	360	230	180	144	120	100	90	72	60	50	36	30	24	20	18	15	12	10	7.2	6	3.6	2.4									
转矩kgf・cm	7.4	11.8	17.8	22.8	29.4	35.5	41.7	46.8	54	64.8	77.8	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5									

型号：5IK40GN-A(C/Y)+5GN20-200K

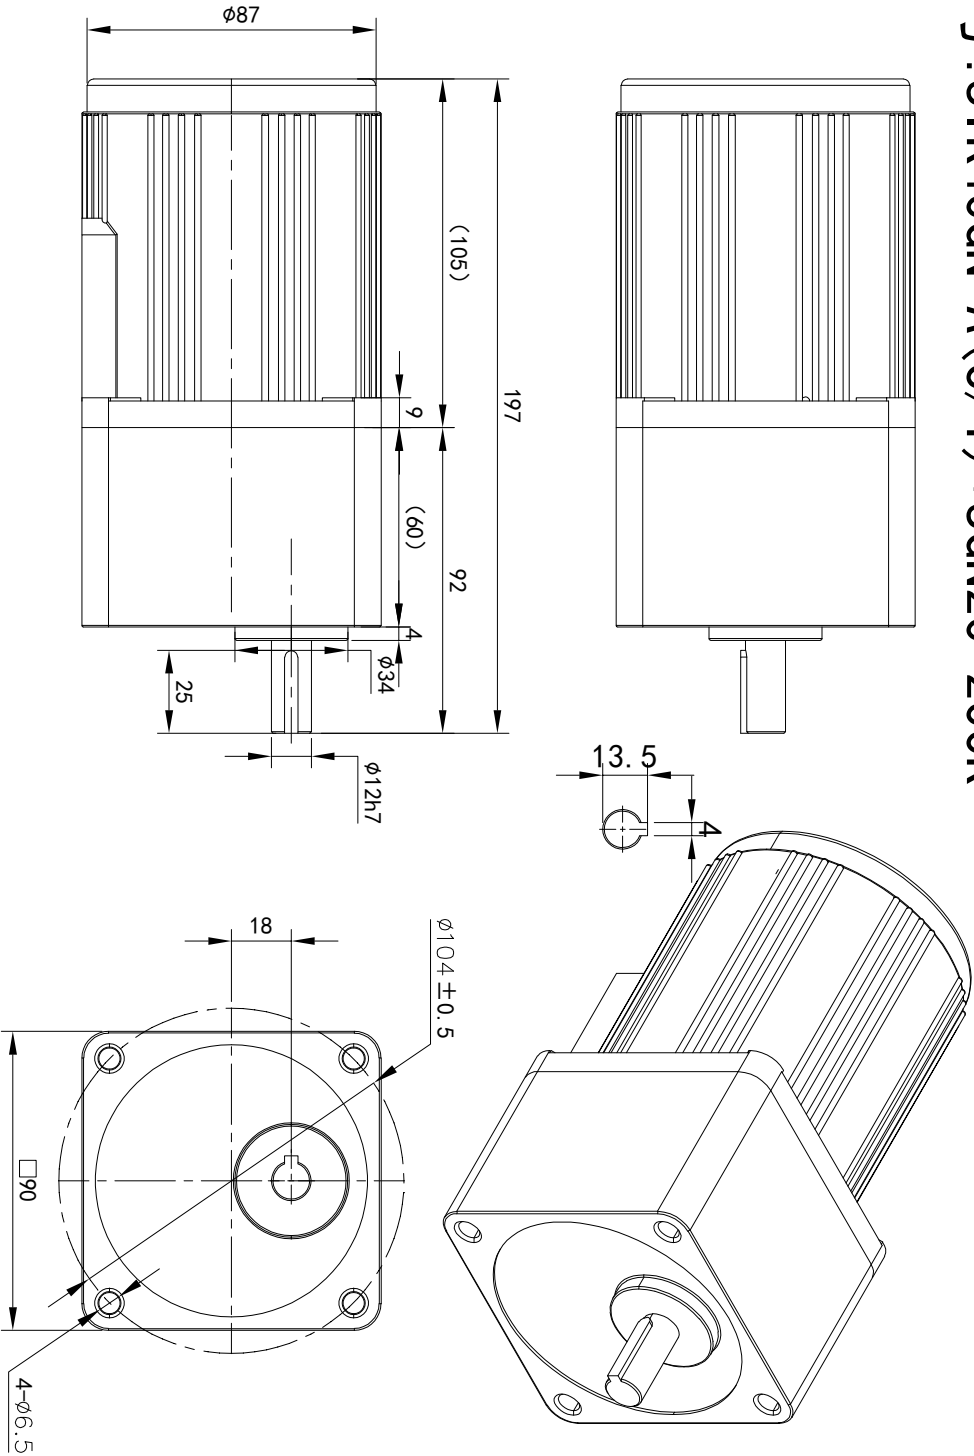

电机参数
功率: 40W
电机额定扭矩: 0.6 -3.2 kg·cm
电压: 单相220V 4P
三相220V/380V 4P
频率: 50Hz - 60Hz

减速机参数
减速比: 参阅上方表格
转速: 参阅上方表格
扭矩: 参阅上方表格

请签字 (章) 图传
Please sign (seal) to return the call

备注/附件登记																														
旧版图号																														
版次																														
日期																														
签字																														
盖章																														
日期																														
单马达接线图																														
三相马达接线图																														
设计																														
校对																														
审核																														
工艺																														
标记																														
处数																														
分区																														
更改文件号																														
签名																														
年月日																														
选型技术号																														
视图方式																														
重量																														
比例																														
共 1 张 第 1 张																														
A4																														
5IK40GN-A(C/Y)+5GN20-200K																														

OPG
OUBANG
浙江欧邦电机有限公司

微型感应减速机