


| 140W          |      |     |      |      |      |       |       |     |       |       |     |     |     | 转矩单位换算：(kgf・cm×9.8÷100)=N.m (牛顿・米) |     |     |      |     |     |     |     |     |     |
|---------------|------|-----|------|------|------|-------|-------|-----|-------|-------|-----|-----|-----|------------------------------------|-----|-----|------|-----|-----|-----|-----|-----|-----|
| 速比 i          | 3    | 5   | 7.5  | 10   | 12.5 | 15    | 18    | 20  | 25    | 30    | 36  | 50  | 60  | 75                                 | 90  | 100 | 120  | 150 | 180 | 250 | 300 | 500 | 750 |
| 转速 rpm (50Hz) | 500  | 300 | 200  | 150  | 120  | 100   | 83    | 75  | 60    | 50    | 41  | 30  | 25  | 20                                 | 16  | 15  | 12.5 | 10  | 8.3 | 6   | 5   | 3   | 2   |
| 转速 rpm (60Hz) | 600  | 360 | 230  | 180  | 144  | 120   | 100   | 90  | 72    | 60    | 50  | 36  | 30  | 24                                 | 20  | 18  | 15   | 12  | 10  | 7.2 | 6   | 3.6 | 2.4 |
| 转矩 kgf・cm     | 25.2 | 42  | 62.4 | 83.6 | 95.6 | 115.2 | 139.6 | 162 | 190.8 | 230.5 | 249 | 277 | 332 | 400                                | 400 | 400 | 400  | 400 | 400 | 400 | 400 | 400 | 400 |

型号：6IK140RGN-A (C) MF+6GN3-200K

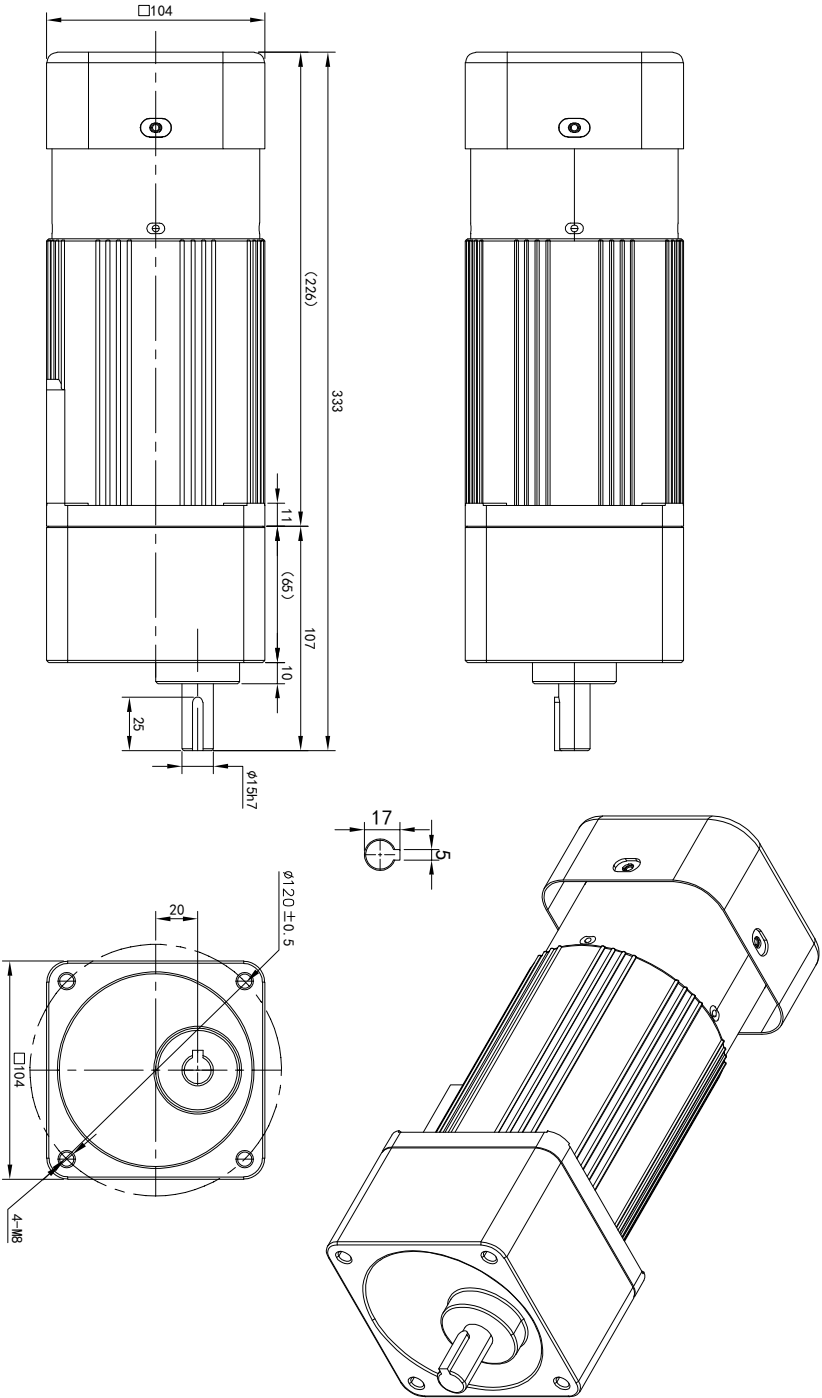

电机参数  
功率：140W  
电机额定扭矩：4.5-10kg·cm  
电压：单相110/220V 4P  
频率：50Hz – 60Hz

减速机参数  
减速比：参阅上方表格  
转速：参阅上方表格  
扭矩：参阅上方表格

请签字 (章) 盖章  
Please sign (stamp) to return the bill

|                                                                     |  |         |  |    |  |       |  |      |  |     |  |       |  |                      |  |  |  |  |  |             |  |    |  |    |  |                              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|---------------------------------------------------------------------|--|---------|--|----|--|-------|--|------|--|-----|--|-------|--|----------------------|--|--|--|--|--|-------------|--|----|--|----|--|------------------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| 备注/附件登记                                                             |  |         |  |    |  |       |  |      |  |     |  |       |  |                      |  |  |  |  |  |             |  |    |  |    |  |                              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 旧底图编号                                                               |  |         |  |    |  |       |  |      |  |     |  |       |  |                      |  |  |  |  |  |             |  |    |  |    |  |                              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 底图总号                                                                |  |         |  |    |  |       |  |      |  |     |  |       |  |                      |  |  |  |  |  |             |  |    |  |    |  |                              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 签字                                                                  |  |         |  |    |  |       |  |      |  |     |  |       |  |                      |  |  |  |  |  |             |  |    |  |    |  |                              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 日期                                                                  |  |         |  |    |  |       |  |      |  |     |  |       |  |                      |  |  |  |  |  |             |  |    |  |    |  |                              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                                                     |  |         |  |    |  |       |  |      |  |     |  |       |  |                      |  |  |  |  |  |             |  |    |  |    |  |                              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 黄线为刹车线，电压默认为AC220V/110V (其它电压可定制需单独接电源)                             |  |         |  |    |  |       |  |      |  |     |  |       |  |                      |  |  |  |  |  |             |  |    |  |    |  |                              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                                                     |  |         |  |    |  |       |  |      |  |     |  |       |  |                      |  |  |  |  |  |             |  |    |  |    |  |                              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 黄线为刹车线 (电压默认为AC220V，其它电压可定制需单独接电源)<br>刹车调速电机需配专用调速器，有多款调速器，该接线图仅供参考 |  |         |  |    |  |       |  |      |  |     |  |       |  |                      |  |  |  |  |  |             |  |    |  |    |  |                              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 设计                                                                  |  | 处数      |  | 分区 |  | 更改文件号 |  | 签名   |  | 年月日 |  | 选型技术号 |  | www.oubang-motor.com |  |  |  |  |  | 视图方式        |  | 重量 |  | 比例 |  | 浙江欧邦电机有限公司                   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 校对                                                                  |  | Q. H. W |  |    |  | 标准    |  | V1.0 |  |     |  |       |  |                      |  |  |  |  |  | 共 1 张 第 1 张 |  |    |  |    |  | 6IK140RGN-A (C) MF+6GN3-200K |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 审核                                                                  |  |         |  |    |  | 批准    |  |      |  |     |  |       |  |                      |  |  |  |  |  |             |  |    |  |    |  |                              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 工艺                                                                  |  |         |  |    |  |       |  |      |  |     |  |       |  |                      |  |  |  |  |  |             |  |    |  |    |  |                              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |