



60W																		转矩单位换算：(k.gf·cm×9.8÷100)=N.m (牛·米)					
速比:	3	5	7.5	10	12.5	15	18	20	25	30	36	50	60	75	90	100	120	150	180	250	300	500	750
转速rpm(50HZ)	500	300	200	150	120	100	83	75	60	50	41	30	25	20	16	15	12.5	10	8.3	6	5	3	2
转速rpm(60HZ)	600	360	230	180	144	120	100	90	72	60	50	36	30	24	20	18	15	12	10	7.2	6	3.6	2.4
轴伸φ: cm	11	17.8	26.5	33.8	48	55.4	65	72.5	87.5	105	105	147	147	147	147	147	147	147	147	147	147	147	147

型号: 5IK60RGN-A(C) T+5GN20-200K

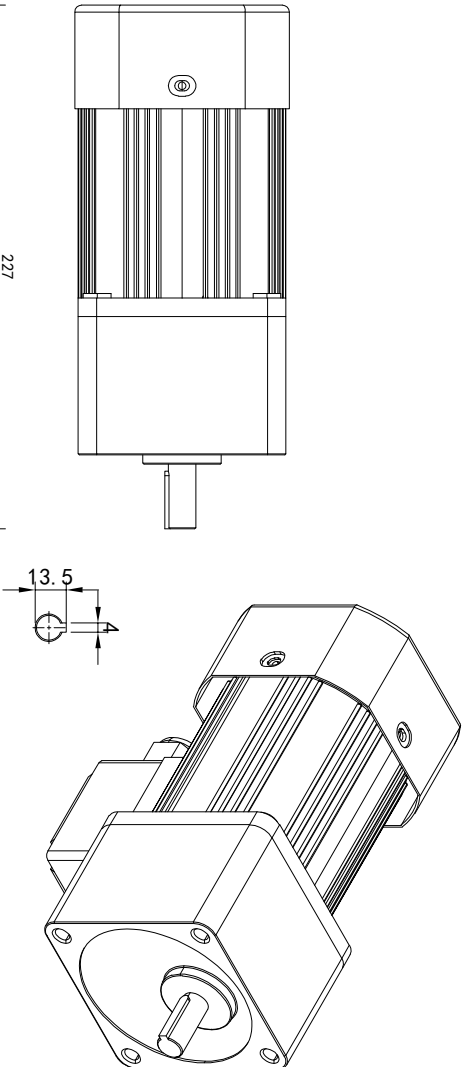

电机参数
功率: 60W
电机额定扭矩: 1.4 -5.5 k.g. cm
电压: 单相220V 4P
频率: 50Hz - 60Hz

减速机参数
减速比: 参阅上方表格
转速: 参阅上方表格
扭矩: 参阅上方表格

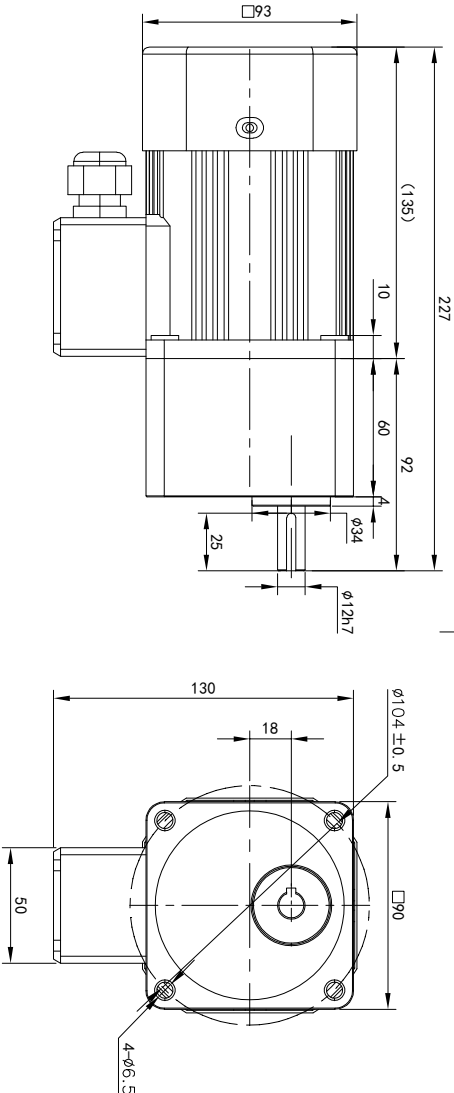

请签字 (章) 图传
Please sign (seal) to return the call

备注/附件登记																																								
旧底图编号																																								
底图总号																																								
签字																																								
日期																																								
单相马达接线图										调速电机需配专用调速器，有多款调速器，该接线图仅供参考																														
设计										校对										审核																				
工艺																																								
标记										处数										分区																				
更改文件号										签名										年月日																				
设计										校对										审核																				
工艺																																								
选型技术号										标准										版本																				
www.oubang-motor.com										V1.0																														
视图方式										重量										比例																				
共 1 张 第 1 张										A4										5IK60RGN-A(C) T+5GN20-200K																				
浙江欧邦电机有限公司										微型感应减速机																														