




40W																		转矩单位换算：(kgf·cm×9.8÷100) =N.m (牛·顿·米)					
速比：	3	5	7.5	10	12.5	15	18	20	25	30	36	50	60	75	90	100	120	150	180	250	300	500	750
转速-rpm (50Hz)	500	300	200	150	120	100	83	75	60	50	41	30	25	20	16	15	12.5	10	8.3	6	5	3	2
转速-rpm (60Hz)	600	360	230	180	144	120	100	90	72	60	50	36	30	24	20	18	15	12	10	7.2	6	3.6	2.4
转矩kgf·cm	7.4	11.8	17.8	22.8	29.4	35.5	41.7	46.8	54	64.8	77.8	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5

型号：5IK40RGU-A(C) +5GU3-750K

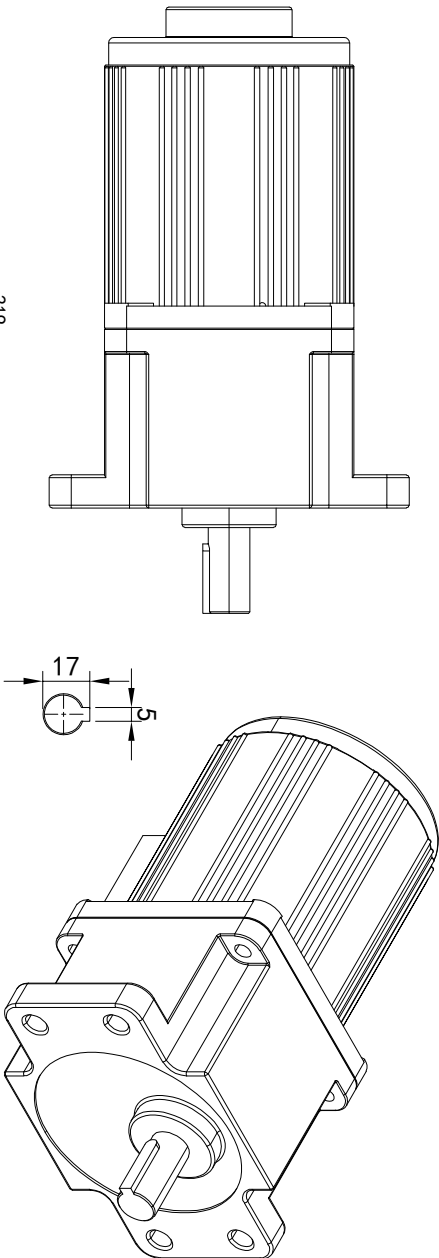

电机参数
功率：40W
电机额定扭矩：0.6 -3.2 kg·cm
电压：单相220V 4P
频率：50Hz - 60Hz

减速机参数
减速比：参阅上方表格
转速：参阅上方表格
扭矩：参阅上方表格

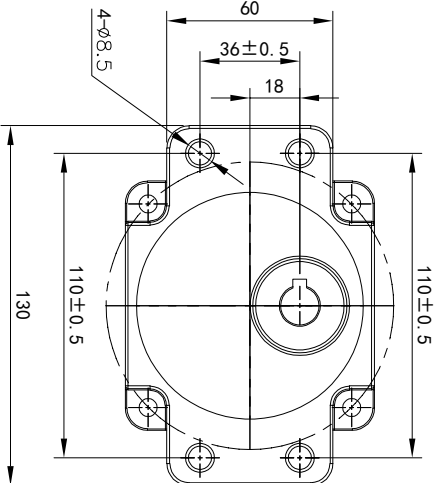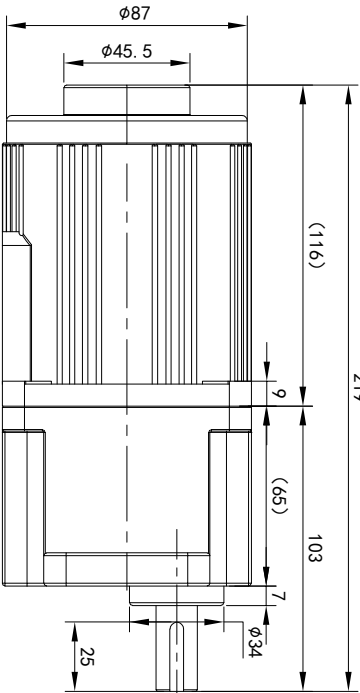

请签字 (章) 回传
Please sign (seal) to return the call

备注/附件登记																																								
旧版图号																																								
底图总号																																								
签字																																								
日期																																								
单相马达接线图																																								
调速电机需配专用调速器，有多款调速器，该接线图仅供参考																																								
标记	设计	校对	审核	工艺	处数	分区	更改文件号	签名	年月日	选型技术号										视图方式		重量	比例	浙江欧邦电机有限公司 微型感应减速机																
																						共 1 张 第 1 张		A4	5IK40RGU-A(C) +5GU3-750K															