
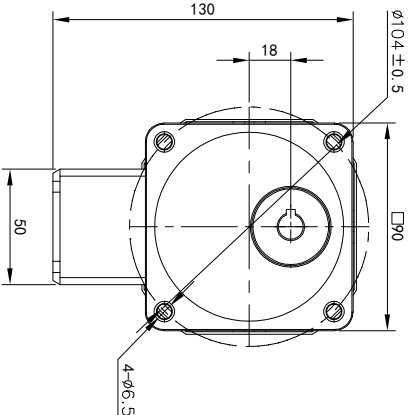
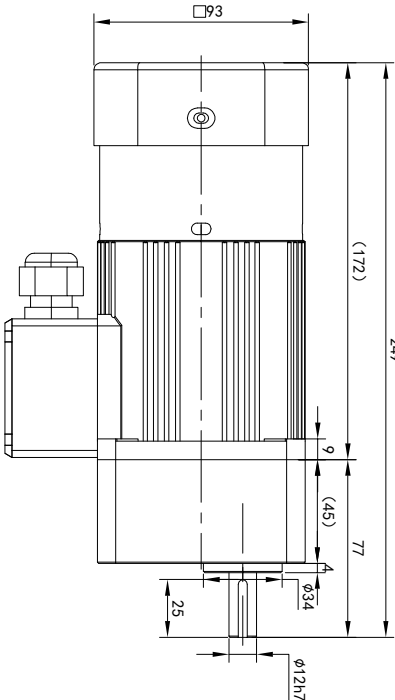
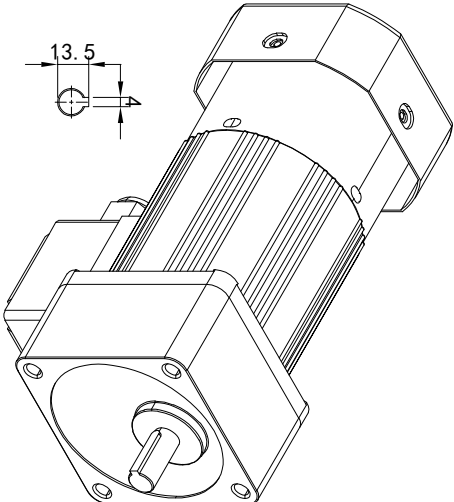


60W																	
转矩单位换算：(kgf·cm×9.8÷100)=N.m (牛·米)																	
速比	3	5	7.5	10	12.5	15	18	20	25	30	36	50	60	75	90	100	120
转速rpm(50HZ)	500	300	200	150	120	100	83	75	60	50	41	30	25	20	16	15	12.5
转速rpm(60HZ)	600	360	230	180	144	120	100	90	72	60	50	36	30	24	20	18	15
轴伸φ: cm	11	17.8	26.5	33.8	48	55.4	65	72.5	87.5	105	105	147	147	147	147	147	147

型号: 5IK60RGN-A(C) MFT+5GN3-18K

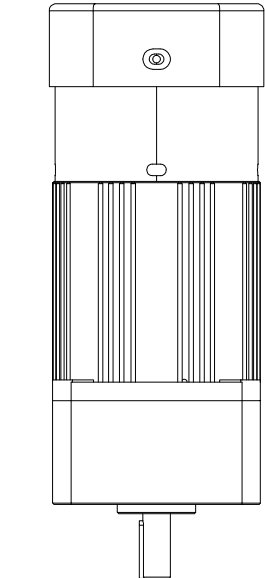

电机参数
功率: 60W
电机额定扭矩: 1.4 -5.5 kg·cm
电压: 单相220V 4P
频率: 50Hz - 60Hz

减速机参数
减速比: 参阅上方表格
转速: 参阅上方表格
扭矩: 参阅上方表格

请签字 (章) 图传
Please sign (seal) to return the call

备注/附件登记																														
旧版图号																														
版数																														
日期																														
签字																														
盖章																														
审核																														
工艺																														
批准																														
设计																														
校对																														
审核																														
工艺																														
标记																														
处数																														
分区																														
更改文件号																														
签名																														
年月日																														
选型技术号																														
视图方式																														
重量																														
比例																														
浙江欧邦电机有限公司																														
微型感应减速机																														
5IK60RGN-A(C) MFT+5GN3-18K																														