
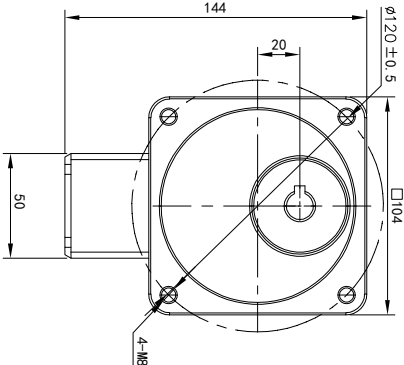
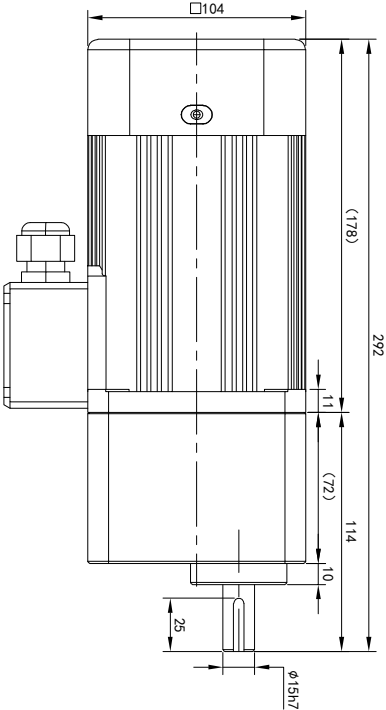


180W/200W/250W																							转矩单位换算：(kgf·cm×9.8÷100)=N.m (牛顿·米)				
速比：	3	5	7.5	10	12.5	15	18	20	25	30	36	50	60	75	90	100	120	150	180	250	300	500	750				
转速rpm (50Hz)	500	300	200	150	120	100	83	75	60	50	41	30	25	20	16	15	12.5	10	8.3	6	5	3	2				
转速rpm (60Hz)	600	360	230	180	144	120	100	90	72	60	50	36	30	24	20	18	15	12	10	7.2	6	3.6	2.4				
转矩kgf·cm	25.2	54.6	81	108.7	124.3	150	181.5	210.6	248	300	324	360	430	520	520	520	520	520	520	520	520	520	520				

型号：6IK180 (200/250) GU-A (C/Y) T+6GU3-180K

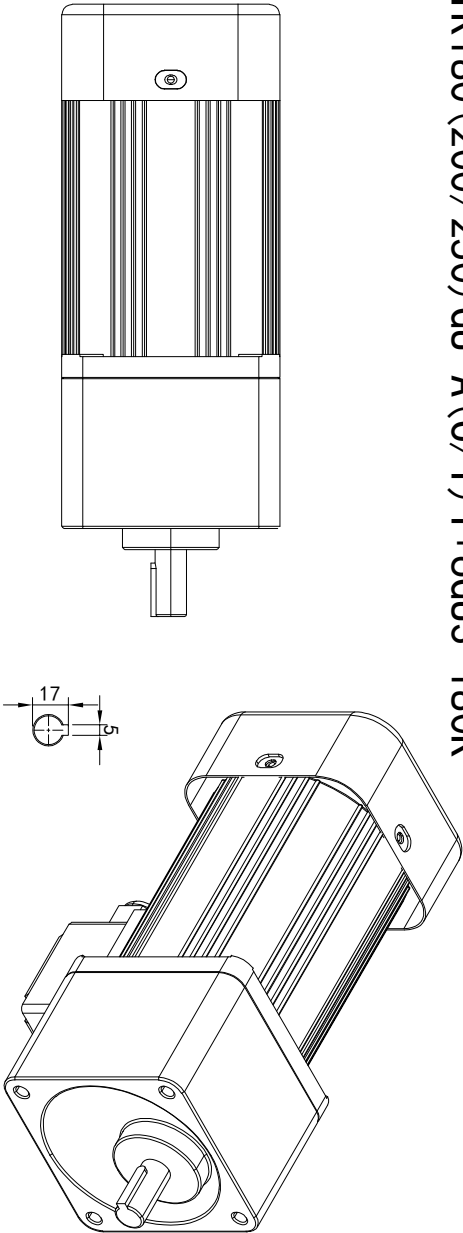

电机参数
功率：180W-250W
电机额定扭矩：
5.5-13kg·cm (180W)
5.5-14.1kg·cm (200W)
5.5-17kg·cm (250W)
电压：单相110/220V 4P
三相220V/380V 4P
频率：50Hz - 60Hz

减速机参数
减速比：参阅上方表格
转速：参阅上方表格
扭矩：参阅上方表格

请签字 (章) 图传
Please sign (seal) to return the call

备注/附件登记																														
旧版图号																														
版图总号																														
签字																														
日期																														
单相马达接线图															三相马达接线图															
标记															设计															
处数															分区															
更改文件号															标准															
签名															版本															
年月日															V1.0															
选型技术号															视图方式															
重量															比例															
共 1 张 第 1 张															A4															
浙江欧邦电机有限公司															微型感应减速机															