
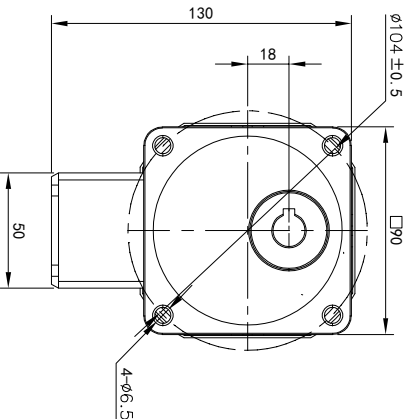
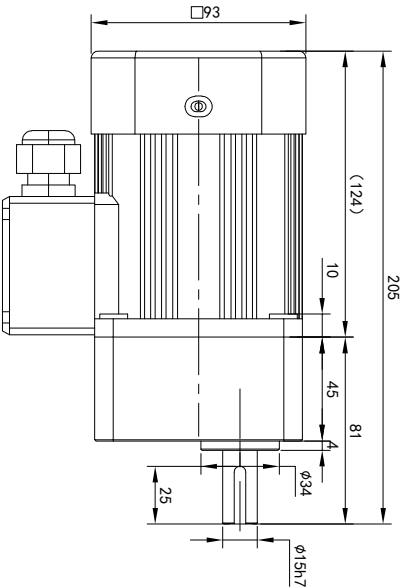

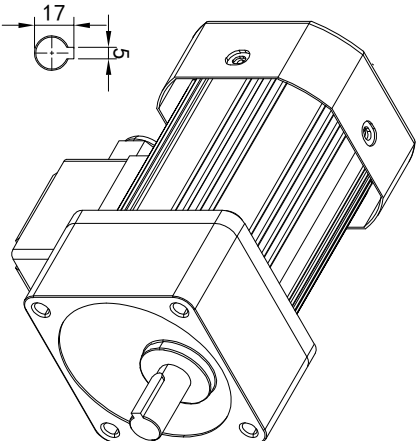


60W																							转矩单位换算：(kgf·cm×9.8÷100)=N·m (牛·米)				
速比:	3	5	7.5	10	12.5	15	18	20	25	30	36	50	60	75	90	100	120	150	180	250	300	500	750				
转速rpm(50HZ)	500	300	200	150	120	100	83	75	60	50	41	30	25	20	16	15	12.5	10	8.3	6	5	3	2				
转速rpm(60HZ)	600	360	230	180	144	120	100	90	72	60	50	36	30	24	20	18	15	12	10	7.2	6	3.6	2.4				
轴伸φ: cm	11	17.8	26.5	33.8	48	55.4	65	72.5	87.5	105	105	147	147	147	147	147	147	147	147	147	147	147	147				

型号: 5IK60GN-A(C/Y) T+5GN3-18KB

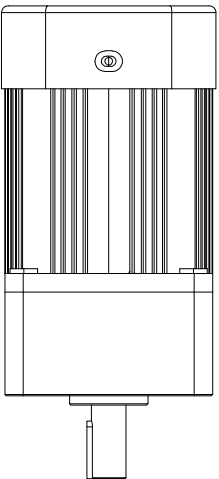

电机参数
功率: 60W

电机额定扭矩: 1.4 -5.5 kg·cm

电压: 单相220V 4P

三相220V/380V 4P

频率: 50Hz - 60Hz

减速机参数

减速比: 参阅上方表格

转速: 参阅上方表格

扭矩: 参阅上方表格

请签字 (章) 图传

Please sign (seal) to return the call

备注/附件登记																																																							
旧版图号																																																							
版图总号																																																							
签字																																																							
日期																																																							
单相马达接线图																																																							
三相马达接线图																																																							
设计	处数	分区	更改文件号	签名	年月日	选型技术号										www.oubang-motor.com										浙江欧邦电机有限公司																													
校对	Q, H, W		标准	版本	V1.0											视图方式										重量										比例																			
审核			批准													共 1 张 第 1 张										A4										5IK60GN-A(C/Y) T+5GN3-18KB																			
工艺																																																							